

| | |
|--|--|
| T.I. no.: 2017 - 25 Updated: - | Topic: SC Soul left side cooling unit, UC, CM and UC+CM |
|--|--|

| | | |
|---------------------------------------|-----------------|------------------------------|
| Date: 16.11.2017 | Priority | Need for action |
| Affected machines: SC Soul | High | As soon as possible |
| From serial number: 1745xxxxxx | Medium | On next visit to the machine |
| As of date: 6/11/2017 | X Low | X FYI only |

INFORMATION

The SCSoul coffee machine is delivered with a milk hose guide at the right by default. The milk hose guide needs to be adapted for other versions such as left side cooling unit, under-counter system or Centre Milk. Starting on 16/11/2017, every side cooling unit will be delivered with 020798 conversion instructions for the necessary conversion work.

NOTE

The SCSoul machines will be equipped with the following components by default starting in CW 45 2017:

- Sheet [079524 hose guide UC KE], see Page 4.
- Guide [079880 left hose guide SCS]

Conversion instructions:


- The conversion instructions in DE are available for internal use with CH tech support or international tech support.
- The EN, FR and ES conversion instructions will be available starting on 16/11/2017.

NOTE FOR RETROFITTING

Retrofitting UC or UC+CM available for machines up to SN 1744xxxxxx:

- For under-counter versions, machines up to SN 1744xxxxxx need sheet "079524 hose guide UC KE" and the matching screws "00.0047.3356 left screw PH M4x5 Inox", see Page 4.
- For under-counter and CentreMilk versions, machines up to SN 1744xxxxxx need two sheets "079524 hose guide UC KE" and two sets of matching screws "00.0047.3356 left screw PH M4x5 Inox", see Page 4.
- The [079880 left hose guide SCS] guide cannot be retrofitted, see Page 4.

CONSTRUCTION CLARIFICATION FOR UNDER-COUNTER VARIANTS

 The counter break through for the (UC) under-counter variant requires previous construction clarifications. Note the SCSoul (Index A) installation plan without fail!

ALTERNATIVE TO COUNTER BREAK THROUGH

If a counter break through is not possible due to the installation site, it is possible to set the coffee machine on 40 mm bases. This makes it possible to guide the milk hose in the insulating hose under the machine to the rear under the counter. The 40 mm 079815 bases are not included in the set and must be ordered separately from Schaeerer AG or a service partner.

ACCESSORY SETS

The following accessory sets are enclosed with the side cooling unit according to the order milk variant:

079811 Left/Right side cooling unit

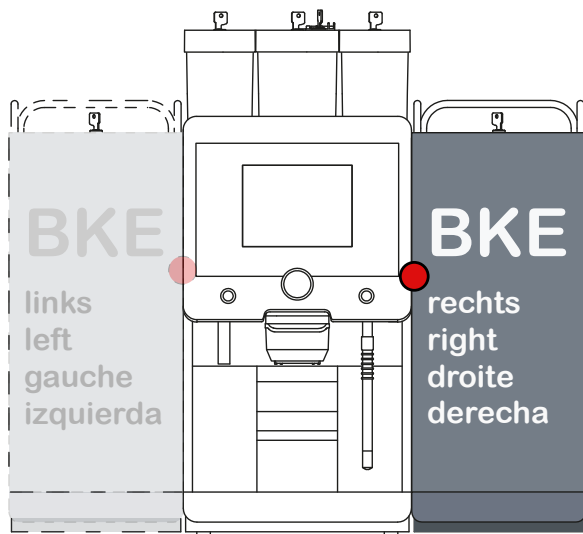


Fig. Right standard side cooling unit

079811 contains the accessories for the side cooling unit if it is placed to the left or right of the coffee machine.

Required conversion steps:

- No conversion is required for the right side cooling unit (standard); the milk hose only has to be shortened to the required length of 28 cm.
- The hose guide of the coffee machine must be retrofitted from the right to the left for the left side cooling unit.
- ▶ For a more detailed description, see conversion instructions 020798.

079812 Under-counter side cooling unit (UC)

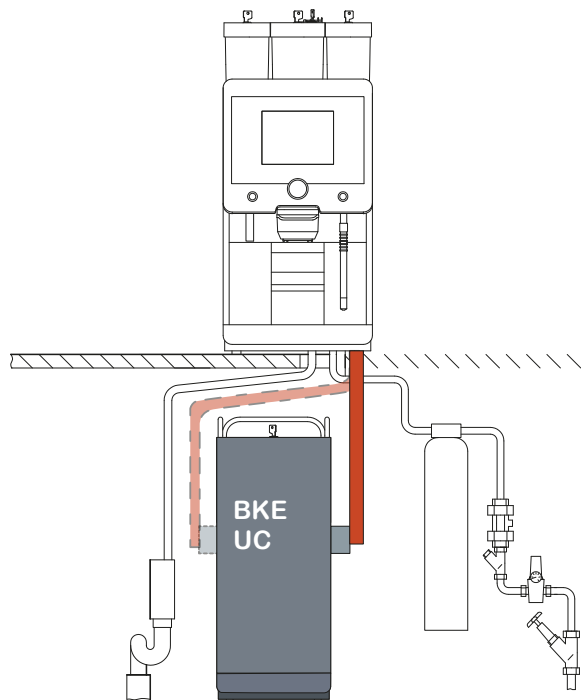


Fig. Left or right under-counter cooling unit with guide

079812 contains the accessories for the side cooling unit if it is placed under the counter.

Required conversion steps:

- Clarify installation-site counter break through, note the SCSoul installation plan.
- Guide the milk hose to the under-counter cooling unit as directly as possible.
- ▶ For a more detailed description, see conversion instructions 020798.

079813 Side cooling unit with Centre Milk

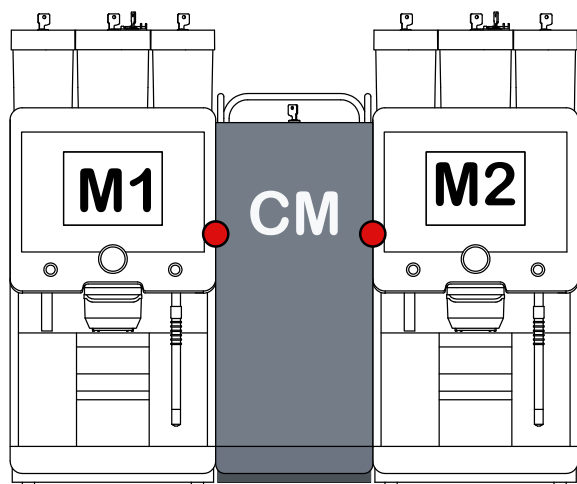


Fig. Side cooling unit with Centre Milk

079813 contains the accessories for the side cooling unit with the "Centre Milk" function.

The Centre Milk side cooling unit also contains CAN nodes connections for the 2nd coffee machine. In addition, the milk container cover is equipped with 2 connections and 2 riser pipes.

Always make sure that beverages cannot be dispensed from either machine during the cleaning process, note the sticker.

Required conversion steps:

- No conversion is required for the right side cooling unit (standard); the milk hose only has to be shortened to the required length of 28 cm.
- The milk hose guide must be led to the left for the [M2] coffee machine on the right side.
- Attach enclosed warning sticker to the cooling unit door.
- ▶ For a more detailed description, see conversion instructions 020798.

079814 Under-counter cooling unit with Centre Milk

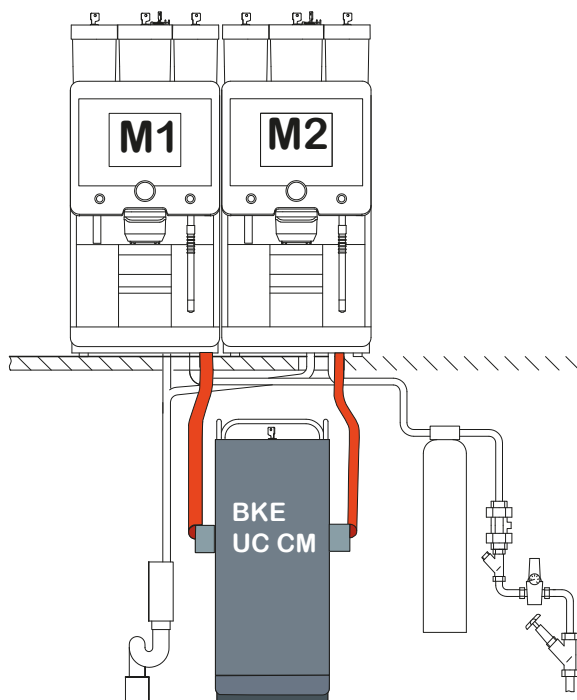


Fig. Under-counter cooling unit with Centre Milk

079814 contains the accessories for the under-counter cooling unit with the "Centre Milk" function.

The Centre Milk under-counter cooling unit also contains CAN nodes connections for the 2nd coffee machine. In addition, the milk container cover is equipped with 2 connections and 2 riser pipes.

Always make sure that beverages cannot be dispensed from either machine during the cleaning process, note the sticker.

Required conversion steps:

- Clarify installation-site counter break through, note the SCSoul installation plan.
- Guide the milk hose to the under-counter cooling unit as directly as possible.
- Attach enclosed warning sticker to the cooling unit door.
- ▶ For a more detailed description, see conversion instructions 020798.

Components required for retrofitting with UC or CM+UC

1x (UC)
2x (CM+UC)

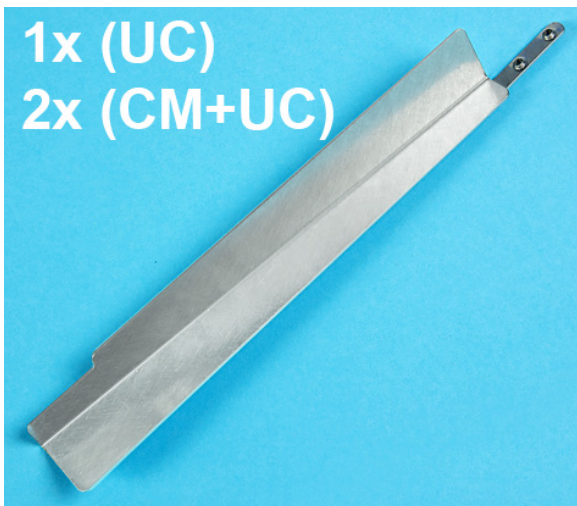


Fig. Sheet079524 hose guide UC KE

2x (UC)
4x (UC+CM)



FIG. SCREWS 00.0047.3356 LEFT SCREWS PH M4X5 INOX

Sheet 079524 is pre-installed starting in CW45 2017 and is not enclosed with any set.

Sheet 079524 must be ordered separately for machines with serial numbers up to SN 1744 xxxxxx which need to be retrofitted.

Two matching screws 00.0047.3356 left screws PH M4x5 Inox should be ordered as well.

2x 079524 and 2x 00.0047.3356 are required for Centre Milk and under-counter cooling unit.

No retrofitting for milk hose guide to the left



Fig. Milk hose guide 079880 to the left

Milk hose guide 079880 is pre-installed starting in CW45 2017 and is not enclosed with any set.

Milk hose guide 079880 option cannot be retrofitted.

The milk hose guide on machines up to SN 1744XXXXXX is to be installed without hose guide 079880.

(EN) This page is intentionally left blank.

(DE) Diese Seite wurde absichtlich frei gelassen.

(FR) Cette page est laissée vide intentionnellement.

(ES) Esta página se dejado en blanco intencionalmente.